

ANGLE BARS


COR12|COR15|COR20|COR30

MASONRY BASE

The use of angle bars is recommended when laying the first row of hemp blocks in some applications. This solution shall be preferred for exterior insulation as an alternative to a base (silica-limestone, cellular glass, etc.) when there is no adequate foundation. They can also be used in new builds to support hemp masonry blocks when the latter are suspended. In general, the angle bar can be used as a lintel in certain applications, or can be used as a connection between two long very thick lintels.



Advantages


 Adapts to any support

 Fast implementation

 Flexibility on-site

 Galvanised steel

References	Usage	Weight approx.	L	I	h
COR12	12cm block	5.7kg	120cm	10cm	10cm
COR15	15cm block	7.4kg	120cm	13cm	13cm
COR20	20cm block	10.2kg	120cm	18cm	18cm
COR30	30cm block	12.7kg	120cm	25cm	20cm

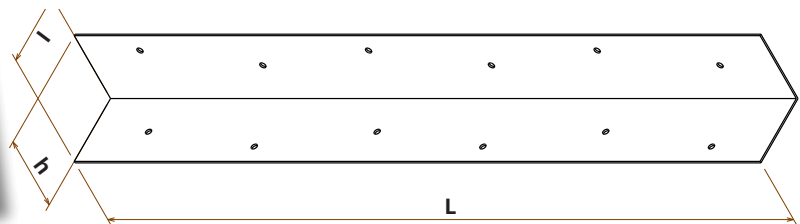

Application

The angle bars are always positioned at a certain distance from the ground. It is vital to use the angle bar suitable for the thickness of the hemp block and use screws of at least 8mm in diameter for mounting the bracket in the support. The use of this solution can only be considered with a highly resistant support (concrete, terracotta, etc.).*

* For further details, please refer to the IsoHemp implementation guide or contact the IsoHemp technical department.



Packaging

Sale	By part or by order
Storage	Dry